
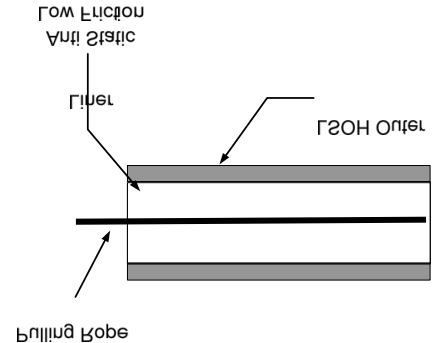


## Verticasa Drop Tube -Internal

Prysmian Part Numbers: See below



Verticasa Drop Tubes are used to route Verticasa fibre modules to the customers premises. The internal drop tube is a 5mm diameter LSOH tube with a low friction liner on the inside wall of the tube. The tube also contains a pre-installed pulling rope to make fibre installation easy.

## Features and Benefits

- Low Friction tube with an anti static bore.
- Supplied with a pulling rope pre-installed for easy fibre installation.
- Tube plugs are available to ensure access to the pulling rope when cutting the drop tube into lengths.
- Available in internal and external formats. External format is the internal tube with an extra polyethylene sheath. See data sheet AC018.
- Reduced Fire Hazard Tube.

## Part Numbers

- XBFSC00383**–5mm internal Drop Tube –500m Drum
- XBFSC00358**–5mm Internal Drop Tube –1km Drum
- XBFSC00359**–5mm Internal Drop Tube –2km drum

## Additional Items

- XBFSC00363**–Verticasa Tube Plugs (pack of 10)

The Verticasa Tube Plugs are used to grip the pulling rope in the end of the tube and stop it from slipping back inside the tube. They are ideal for gripping the rope when cutting the drop tubes into various lengths.

## Technical Data

•Outer tube diameter:	5.0mm
•Inner tube diameter:	3.5mm
•Maximum Tensile:	80N
•Crush Rating:	0.4kN
•Impact:	1J
•Operating temperature:	-20oC to + 40oC (5 to 95% RH)
•Material:-	LSOH UL94 V0
•Finish:-	White

Please contact your local sales office listed on [www.prysmiangroup.com](http://www.prysmiangroup.com)

©PrysmianGroup2012,AllRightsReserved.  
Theinformationcontainedwithinthistdocumentmustnotbecopied,printedorreproducedinanyform,eitherwhollyorinpart,withoutthewrittenconsentofPrysmian Group.Theinformationisbelievedcorrectatthetimeofissue.PrysmianGroupreservestherighttoamendthisspecificationwithoutnotice.This specificationisnot contractuallyvalidunlesspecificallyauthorisedbyPrysmianGroup.